


SD-99545-0

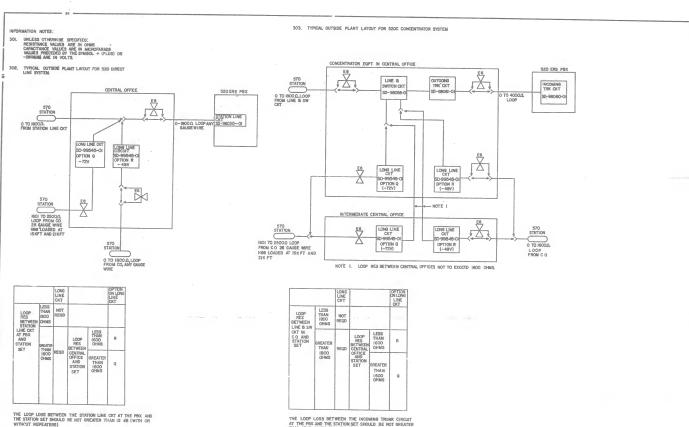

WHEN GAIN DEVICES ARE USED IN ANY OF THE FOLLOWING SECTIONS, THE REPEATER IN THAT SECTION SHOULD BE ADJUSTED FOR A LOOP LOSS OF AT LEAST 3 4B. A. STATION LINE CKT & STATION SET

B. STATION LINE CKT & LONG LINE CKT C LONG LINE CKT & STATION SET

AT THE PBX AND THE STATION SET SHOULD BE NOT GREATER THAN 12 dB (WITH OR WITHOUT PEPEATERS)

WHEN GAIN DEVICES ARE USED IN ANY OF THE FOLLOWING SECTIONS, THE REPEATER IN THAT SECTION SHOULD BE ADJUSTED FOR A LOOP LOSS OF AT LEAST 3 dB.

A. INCOMING TRK CKT & OUTGOING TRK CKT

B. LONG LINE CKT & STATION SET

C. LINE & SWITCH CKT & STATION SET

EMERGENCY REPORTING SYSTEM LONG LINE CIRCUIT

SD-99545-0I-2

30 :10

DRAWING

BELL TELEPHONE LABORATORIES

